

D-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 2 000–5 000 kg

Width: 900–2 000 mm



HIGH PERFORMANCE AND CLAMP HANDLING

FEATURES

- Powerful all-round unit
- High residual capacity
- Light clamp handling
- Excellent visibility for the driver



The D-series is one of our smartest attachments. The unique C-pipe construction gives excellent visibility for the driver and contributes to a safer handling of the goods. Furthermore, the unit offers lighter clamp handling and the weight of the unit is lower than corresponding designs. You get a smooth and soft sideshift even with full load on the forks.

OPTIONS

Pressure relief valve, load backrest and load protector can be added to the attachment or retrofitted. You can choose forks with other dimensions, other materials and coatings but also with other functions such as leveling forks, KOOL-reachforks® and SmartFork® with sensor technology. The attachment is also available with Carrier plates and QCG quick-connect system.

MACHINES



Forklift Truck



Reach Truck





Telescopic Handler

APPLICATIONS



Clamping

D-SERIES

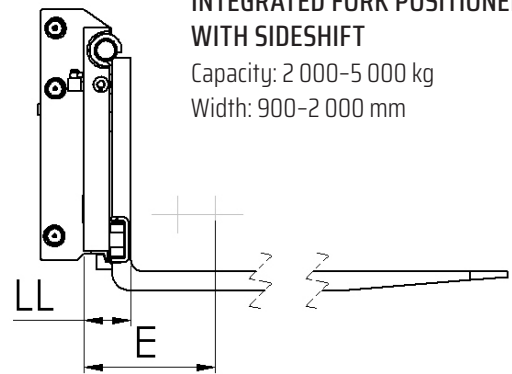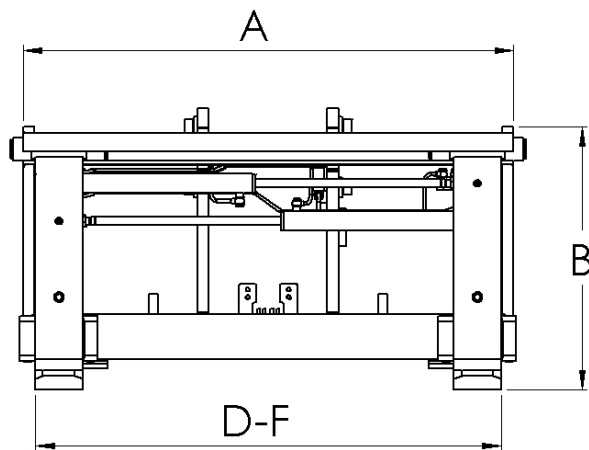

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 2 000–5 000 kg
Width: 900–2 000 mm

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Centre of Gravity	Height	Weight	Effective Thickness	Mounting Class
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	E [c.] mm	B mm	kg	LL mm	ISO 2328
D2-20/900	2000/500	900	300-850	100x40x1200	225	590	195	106	2A/B
D2-20/1000	2000/500	1000	300-950	100x40x1200	220	590	200	106	2A/B
D2-20/1050	2000/500	1050	300-1000	100x40x1200	215	590	205	106	2A/B
D2-20/1100	2000/500	1100	300-1050	100x40x1200	210	590	210	106	2A/B
D2-20/1150	2000/500	1150	300-1100	100x40x1200	205	590	215	106	2A/B
D2-20/1200	2000/500	1200	300-1150	100x40x1200	200	590	220	106	2A/B
D2-25/1000	2500/500	1000	300-950	100x45x1200	240	590	210	111	2A/B
D2-25/1050	2500/500	1050	300-1000	100x45x1200	235	590	215	111	2A/B
D2-25/1100	2500/500	1100	300-1050	100x45x1200	230	590	220	111	2A/B
D2-25/1150	2500/500	1150	300-1100	100x45x1200	225	590	225	111	2A/B
D2-25/1200	2500/500	1200	300-1150	100x45x1200	220	590	230	111	2A/B
D3-35/1150	3500/500	1150	380-1080	125x45x1200	215	680	310	121	3A/B
D3-35/1200	3500/500	1200	380-1130	125x45x1200	210	680	315	121	3A/B
D3-35/1250	3500/500	1250	380-1180	125x45x1200	205	680	320	121	3A/B
D3-35/1300	3500/500	1300	380-1230	125x45x1200	200	680	325	121	3A/B
D3-35/1400	3500/500	1400	380-1330	125x45x1200	190	680	335	121	3A/B
D3-35/1500	3500/500	1500	380-1430	125x45x1200	180	680	345	121	3A/B
D3-35/1600	3500/500	1600	380-1530	125x45x1200	170	680	355	121	3A/B
D4-50/1350	5000/500	1350	380-1290	125x50x1200	185	695	417	136	3A/B
D4-50/1400	5000/500	1400	380-1340	125x50x1200	180	695	424	136	3A/B
D4-50/1450	5000/500	1450	380-1390	125x50x1200	175	695	431	136	3A/B
D4-50/1500	5000/500	1500	380-1440	125x50x1200	170	695	438	136	3A/B
D4-50/1600	5000/500	1600	380-1540	125x50x1200	160	695	452	136	3A/B
D4-50/1700	5000/500	1700	380-1640	125x50x1200	150	695	466	136	3A/B
D4-50/1800	5000/500	1800	380-1740	125x50x1200	140	695	480	136	3A/B
D4-50/1900	5000/500	1900	380-1840	125x50x1200	130	695	494	136	3A/B
D4-50/2000	5000/500	2000	380-1940	125x50x1200	120	695	508	136	3A/B
D4E-50/1350	5000/600	1350	420-1280	150x50x1200	165	806	496	136	3A/B, 4A/B
D4E-50/1400	5000/600	1400	420-1330	150x50x1200	160	806	500	136	3A/B, 4A/B
D4E-50/1450	5000/600	1450	420-1380	150x50x1200	155	806	504	136	3A/B, 4A/B
D4E-50/1500	5000/600	1500	420-1430	150x50x1200	150	806	508	136	3A/B, 4A/B
D4E-50/1600	5000/600	1600	420-1530	150x50x1200	140	806	516	136	3A/B, 4A/B
D4E-50/1700	5000/600	1700	420-1630	150x50x1200	130	806	524	136	3A/B, 4A/B
D4E-50/1800	5000/600	1800	420-1730	150x50x1200	120	806	532	136	3A/B, 4A/B
D4E-50/1900	5000/600	1900	420-1830	150x50x1200	110	806	540	136	3A/B, 4A/B
D4E-50/2000	5000/600	2000	420-1930	150x50x1200	100	806	548	136	3A/B, 4A/B