

E-SERIES


INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 2 000 – 8 000 kg
Width: 900 – 2 000 mm

EXCELLENT IN DIRTY ENVIRONMENTS

FEATURES

- Suitable for dirty environments
- Precise positioning of the forks
- Silent operation
- Good visibility for the driver



With the E-series you get a Pin-type unit. This means that the forks hang on a pin in the unit. With encapsulated, high-quality bearings, it is especially suitable for dirty environments and allows sideshifting with full load. The design also offers high performance in terms of precise positioning and noiseless operation.

OPTIONS

Load backrest and load protector can be added to the attachment or retrofitted. You can choose forks with other dimensions, other materials and coatings but also with other functions such as leveling forks, KDOI-reachforks® and SmartFork® with sensor technology. The attachment is also available with Carrier plats and QC6 quick-connect system.

MACHINES



Forklift Truck



Reach Truck




Telescopic Handler

APPLICATIONS



Dirty environments

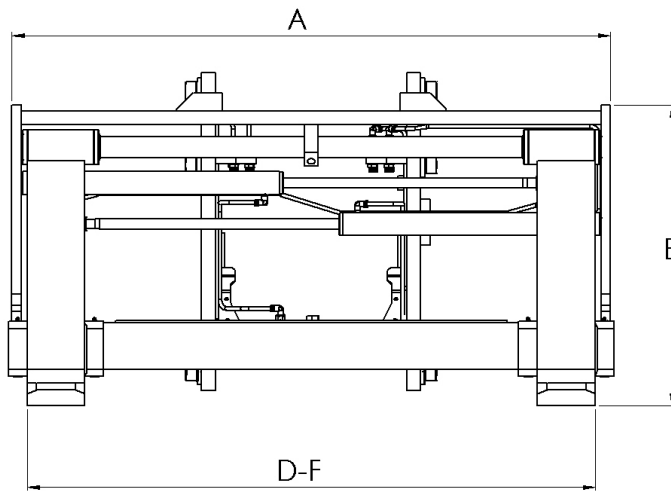


E-SERIES


INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 2 000 – 8 000 kg

Width: 900 – 2 000 mm

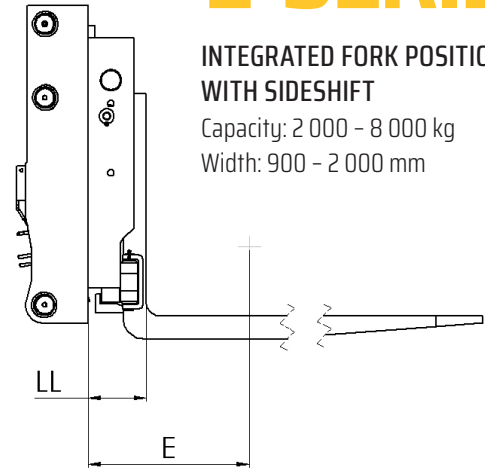

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Centre of Gravity	Height	Weight	Effective Thickness	Mounting Class
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	E [c.] mm	B mm	kg	LL mm	ISO 2328
E2-20/900	2000/500	900	330-840	100x40x1200	221	595	207	96	2A/B
E2-20/1000	2000/500	1000	330-940	100x40x1200	219	595	210	96	2A/B
E2-20/1050	2000/500	1050	330-990	100x40x1200	217	595	213	96	2A/B
E2-20/1100	2000/500	1100	330-1040	100x40x1200	215	595	216	96	2A/B
E2-20/1150	2000/500	1150	330-1090	100x40x1200	213	595	219	96	2A/B
E2-20/1200	2000/500	1200	330-1140	100x40x1200	211	595	222	96	2A/B
E2-20/1300	2000/500	1300	330-1240	100x40x1200	207	595	228	96	2A/B
E2-20/1400	2000/500	1400	330-1340	100x40x1200	203	595	234	96	2A/B
E2-25/1000	2500/500	1000	330-940	100x40x1200	174	605	232	96	2A/B
E2-25/1050	2500/500	1050	330-990	100x40x1200	172	605	236	96	2A/B
E2-25/1100	2500/500	1100	330-1040	100x40x1200	170	605	240	96	2A/B
E2-25/1150	2500/500	1150	330-1090	100x40x1200	168	605	244	96	2A/B
E2-25/1200	2500/500	1200	330-1140	100x40x1200	166	605	248	96	2A/B
E3-30/1100	3000/500	1100	340-1030	120x40x1200	220	640	300	117	3A/B
E3-30/1150	3000/500	1150	340-1080	120x40x1200	218	640	305	117	3A/B
E3-30/1200	3000/500	1200	340-1130	120x40x1200	216	640	310	117	3A/B
E3-30/1250	3000/500	1250	340-1180	120x40x1200	214	640	315	117	3A/B
E3-30/1300	3000/500	1300	340-1230	120x40x1200	212	640	320	117	3A/B
E3-30/1400	3000/500	1400	340-1330	120x40x1200	210	640	325	117	3A/B
E3-30/1500	3000/500	1500	340-1430	120x40x1200	208	640	330	117	3A/B
E3-30/1600	3000/500	1600	340-1530	120x40x1200	206	640	335	117	3A/B
E3-35/1150	3500/500	1150	340-1080	125x45x1200	198	640	330	122	3A/B
E3-35/1200	3500/500	1200	340-1130	125x45x1200	196	640	335	122	3A/B
E3-35/1250	3500/500	1250	340-1180	125x45x1200	194	640	340	122	3A/B
E3-35/1300	3500/500	1300	340-1230	125x45x1200	192	640	345	122	3A/B
E3-35/1350	3500/500	1350	340-1280	125x45x1200	190	640	350	122	3A/B
E3-35/1400	3500/500	1400	340-1330	125x45x1200	188	640	355	122	3A/B
E3-35/1500	3000/500	1500	340-1430	125x45x1200	186	640	360	122	3A/B
E3-35/1600	3000/500	1600	340-1530	125x45x1200	184	640	365	122	3A/B
E3-40/1200	4000/500	1200	340-1130	125x45x1200	184	650	345	122	3A/B
E3-40/1300	4000/500	1300	340-1230	125x45x1200	182	650	355	122	3A/B
E3-40/1400	4000/500	1400	340-1330	125x45x1200	180	650	365	122	3A/B
E3-40/1500	4000/500	1500	340-1430	125x45x1200	178	650	375	122	3A/B
E3-40/1600	4000/500	1600	340-1530	125x45x1200	176	650	385	122	3A/B

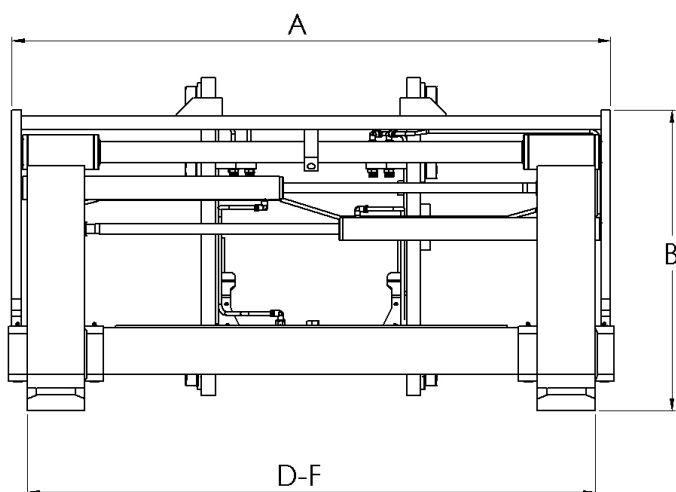


E-SERIES


INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 2 000 – 8 000 kg

Width: 900 – 2 000 mm

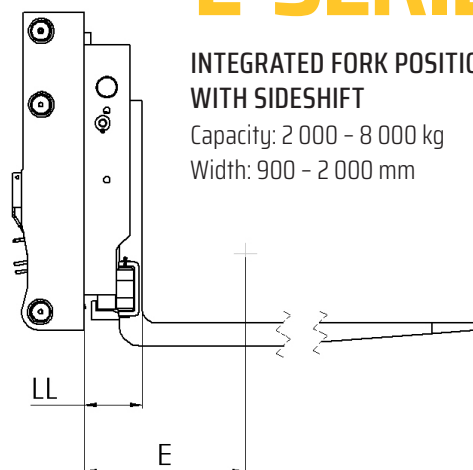

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Centre of Gravity	Height	Weight	Effective Thickness	Mounting Class
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	E [c.] mm	B mm	kg	LL mm	ISO 2328
E4-50/1300	5000/500	1300	450-1200	125x50x1200	170	790	500	125	3A/B
E4-50/1400	5000/500	1400	450-1300	125x50x1200	165	790	520	125	3A/B
E4-50/1500	5000/500	1500	450-1400	125x50x1200	160	790	540	125	3A/B
E4-50/1600	5000/500	1600	450-1500	125x50x1200	155	790	560	125	3A/B
E4-50/1700	5000/500	1700	450-1600	125x50x1200	150	790	580	125	3A/B
E4-50/1800	5000/500	1800	450-1700	125x50x1200	145	790	600	125	3A/B
E4-50/1900	5000/500	1900	450-1800	125x50x1200	140	790	620	125	3A/B
E4-50/2000	5000/500	2000	450-1900	125x50x1200	135	790	640	125	3A/B
E4-50/1300	5000/600	1300	450-1200	130x60x1200	170	849	530	135	3A/B, 4A/B
E4-50/1400	5000/600	1400	450-1300	130x60x1200	165	849	550	135	3A/B, 4A/B
E4-50/1500	5000/600	1500	450-1400	130x60x1200	160	849	570	135	3A/B, 4A/B
E4-50/1600	5000/600	1600	450-1500	130x60x1200	155	849	590	135	3A/B, 4A/B
E4-50/1700	5000/600	1700	450-1600	130x60x1200	150	849	610	135	3A/B, 4A/B
E4-50/1800	5000/600	1800	450-1700	130x60x1200	145	849	630	135	3A/B, 4A/B
E4-50/1900	5000/600	1900	450-1800	130x60x1200	140	849	650	135	3A/B, 4A/B
E4-50/2000	5000/600	2000	450-1900	130x60x1200	140	849	620	135	3A/B, 4A/B
E4-60/1300	6000/600	1300	450-1200	130x60x1200	170	849	530	135	4A/B
E4-60/1400	6000/600	1400	450-1300	130x60x1200	165	849	550	135	4A/B
E4-60/1500	6000/600	1500	450-1400	130x60x1200	160	849	570	135	4A/B
E4-60/1600	6000/600	1600	450-1500	130x60x1200	155	849	590	135	4A/B
E4-60/1700	6000/600	1700	450-1600	130x60x1200	150	849	610	135	4A/B
E4-60/1800	6000/600	1800	450-1700	130x60x1200	145	849	630	135	4A/B
E4-60/1900	6000/600	1900	450-1800	130x60x1200	140	849	650	135	4A/B
E4-70/1800	7000/600	1800	450-1640	150x60x1200	175	950	950	155	4A/B
E4-70/1900	7000/600	1900	450-1740	150x60x1200	170	950	975	155	4A/B
E4-70/2000	7000/600	2000	450-1840	150x60x1200	165	950	1000	155	4A/B
E4-70/2100	7000/600	2100	450-1940	150x60x1200	160	950	1025	155	4A/B
E4-70/2200	7000/600	2200	450-2040	150x60x1200	155	950	1050	155	4A/B
E4-70/2300	7000/600	2300	450-2140	150x60x1200	150	950	1075	155	4A/B
E4-70/2400	7000/600	2400	450-2240	150x60x1200	145	950	1100	155	4A/B
E4-80/1800	8000/600	1800	450-1640	150x65x1200	180	950	965	160	4A/B
E4-80/1900	8000/600	1900	450-1740	150x65x1200	175	950	990	160	4A/B
E4-80/2000	8000/600	2000	450-1840	150x65x1200	170	950	1015	160	4A/B
E4-80/2100	8000/600	2100	450-1940	150x65x1200	165	950	1040	160	4A/B
E4-80/2200	8000/600	2200	450-2040	150x65x1200	160	950	1065	160	4A/B

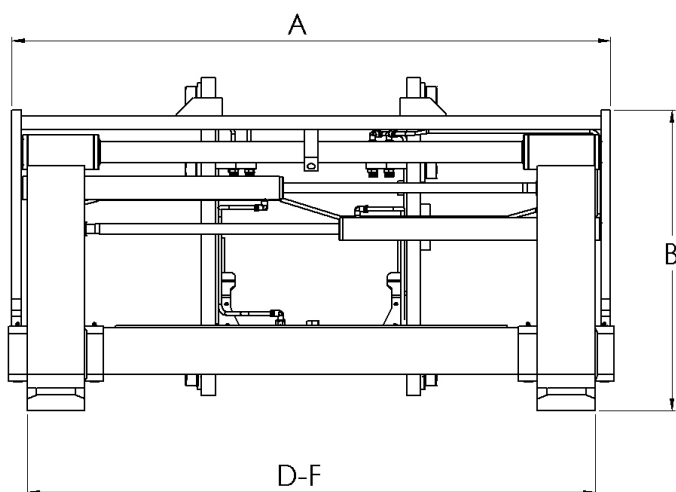


E-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 2 000 - 8 000 kg

Width: 900 - 2 000 mm

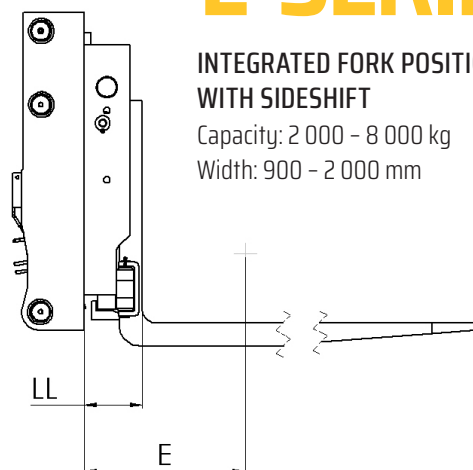

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Centre of Gravity	Height	Weight	Effective Thickness	Mounting Class
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	E [c.] mm	B mm	kg	LL mm	ISO 2328
E4-80/2300	8000/600	2300	450-2140	150x65x1200	155	950	1090	160	4A/B
E4-80/2400	8000/600	2400	450-2240	150x65x1200	150	950	1115	160	4A/B
E4-80/1800	8000/900	1800	450-1640	150x75x1200	185	950	995	170	4A/B
E4-80/1900	8000/900	1900	450-1740	150x75x1200	180	950	1020	170	4A/B
E4-80/2000	8000/900	2000	450-1840	150x75x1200	175	950	1045	170	4A/B
E4-80/2100	8000/900	2100	450-1940	150x75x1200	170	950	1070	170	4A/B
E4-80/2200	8000/900	2200	450-2040	150x75x1200	165	950	1095	170	4A/B
E4-80/2300	8000/900	2300	450-2140	150x75x1200	160	950	1120	170	4A/B
E4-80/2400	8000/900	2400	450-2240	150x75x1200	155	950	1145	170	4A/B