

F-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 6 000 – 16 000 kg

Width: 1 000 – 3 000 mm

FOR HEAVY LOADS AND MAXIMUM VISIBILITY


FEATURES

- Built for heavy loads
- Suitable for very dirty environments
- Protected piping
- Maximum visibility for the driver

The F-series is constructed for tough environments and where there are very high demands on unit. The forks are roller-mounted using 6 rollers on each fork (4 up and 2 down). The attachment sideshift easily and smoothly even with heavy loads. The visibility for the driver is outstanding, making work safe and secure.

OPTIONS

Load backrest can be added to the attachment. You can choose forks with other dimensions, other materials and coatings but also with other functions such as levelling forks, KOOL-reachforks® and SmartFork® with sensor technology. The attachment is also available with Carrier plats and QC6 quick-connect system.



MACHINES



Forklift Truck



Telescopic Handler

APPLICATIONS



Heavy loads





Dirty environments

F-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 6 000 - 16 000 kg

Width: 1 000 - 3 000 mm

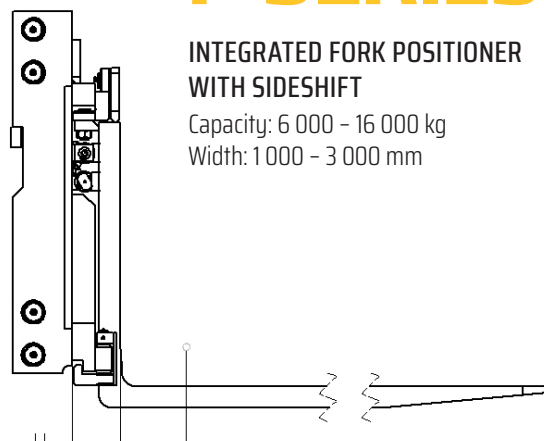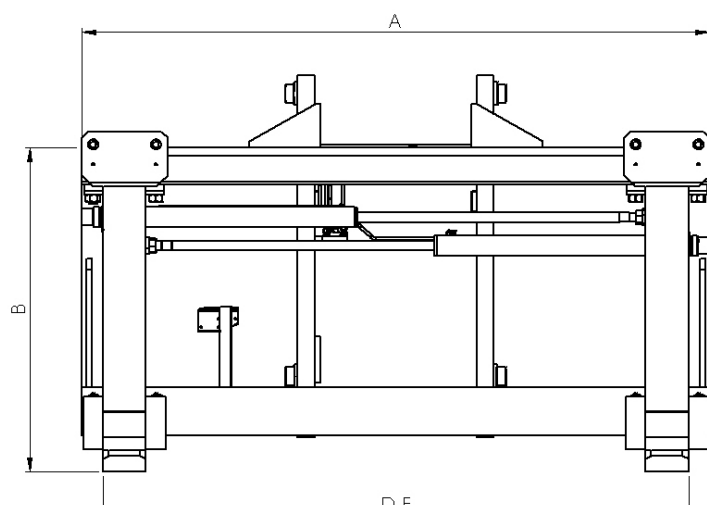

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Centre of Gravity	Height	Weight	Effective Thickness	Mounting Class
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	E [c.] mm	B mm	kg	LL mm	ISO 2328
F4-60/1300	6000/600	1300	450-1200	130x60x1200	170	776/827	570	146	3A, 4A
F4-60/1400	6000/600	1400	450-1300	130x60x1200	165	776/827	580	146	3A, 4A
F4-60/1450	6000/600	1450	450-1350	130x60x1200	167	776/827	585	146	3A, 4A
F4-60/1500	6000/600	1500	450-1400	130x60x1200	160	776/827	590	146	3A, 4A
F4-60/1550	6000/600	1550	450-1450	130x60x1200	157	776/827	595	146	3A, 4A
F4-60/1600	6000/600	1600	450-1500	130x60x1200	155	776/827	600	146	3A, 4A
F4-60/1700	6000/600	1700	450-1600	130x60x1200	150	776/827	610	146	3A, 4A
F4-60/1800	6000/600	1800	450-1700	130x60x1200	145	776/827	620	146	3A, 4A
F4-60/1900	6000/600	1900	450-1800	130x60x1200	140	776/827	630	146	3A, 4A
F4-60/2000	6000/600	2000	450-1900	130x60x1200	135	776/827	640	146	3A, 4A
F4-80/1800	8000/600	1800	450-1650	150x65x1200	125	952	955	160	4A
F4-80/1900	8000/600	1900	450-1750	150x65x1200	120	952	975	160	4A
F4-80/2000	8000/600	2000	450-1850	150x65x1200	115	952	995	160	4A
F4-80/2100	8000/600	2100	450-1950	150x65x1200	110	952	1015	160	4A
F4-80/2200	8000/600	2200	450-2050	150x65x1200	105	952	1035	160	4A
F4-80/2300	8000/600	2300	450-2150	150x65x1200	100	952	1055	160	4A
F4-80/2400	8000/600	2400	450-2250	150x65x1200	95	952	1075	160	4A
F4-120/1800	12000/600	1800	470-1650	150x75x1200	170	1140	1100	165	4A
F4-120/1900	12000/600	1900	470-1750	150x75x1200	200	1140	1150	165	4A
F4-120/2000	12000/600	2000	470-1850	150x75x1200	230	1140	1200	165	4A
F4-120/2100	12000/600	2100	470-1950	150x75x1200	260	1140	1250	165	4A
F4-120/2200	12000/600	2200	470-2050	150x75x1200	290	1140	1300	165	4A
F4-120/2300	12000/600	2300	470-2150	150x75x1200	320	1140	1350	165	4A
F4-120/2400	12000/600	2400	470-2250	150x75x1200	350	1140	1400	165	4A
F4-120/2500	12000/600	2500	470-2350	150x75x1200	380	1140	1450	165	4A
F4-140/1800	14000/600	1800	540-1700	200x70x1200	220	1160	1300	185	4A
F4-140/1900	14000/600	1900	540-1800	200x70x1200	250	1160	1350	185	4A
F4-140/2000	14000/600	2000	540-1900	200x70x1200	280	1160	1400	185	4A
F4-140/2100	14000/600	2100	540-2000	200x70x1200	310	1160	1450	185	4A
F4-140/2200	14000/600	2200	540-2100	200x70x1200	340	1160	1500	185	4A
F4-140/2300	14000/600	2300	540-2200	200x70x1200	370	1160	1550	185	4A
F4-140/2400	14000/600	2400	540-2300	200x70x1200	400	1160	1600	185	4A
F4-140/2500	14000/600	2500	540-2400	200x70x1200	430	1160	1650	185	4A
F4-160/2300	16000/1200	2300	750-2150	250x90x2400	420	1360	2440	286	
F4-160/2500	16000/1200	2500	750-2350	250x90x2400	410	1360	2500	286	
F4-160/2700	16000/1200	2700	750-2550	250x90x2400	400	1360	2560	286	
F4-160/3000	16000/1200	3000	750-2850	250x90x2400	390	1360	2620	286	