

F4S-SERIES

INTEGRATED FORK POSITIONER
WITH SIDESHIFT AND SLOPING


Capacity: 8 000 – 16 000 kg

Width: 1 000 – 3 000 mm

ROBUST WITH POWERED PILE SLOPE

FEATURES

- Built for heavy loads
- Sloping function
- Protected piping
- Maximum visibility for the driver



F4S is constructed for tough environments and where there are very high demands on unit. The forks are roller-mounted using 6 rollers on each fork (4 up and 2 down). The attachment sideshifts easily and smoothly even with heavy loads. F4S also has a powered pile slope function which allows “tilt” of ± 4 -5 degrees. The visibility for the driver is outstanding, making work safe and secure. F4S is an excellent choice for the wood industry.

OPTIONS

Load backrest can be added to the attachment. You can choose forks with other dimensions, other materials and coatings but also with other functions such as KOOI-reach-forks® and SmartFork® with sensor technology. The attachment is also available with Carrier plats and QC6 quick-connect system.

MACHINES



Forklift Truck



Telescopic Handler

APPLICATIONS



Heavy loads



Dirty environments




Rugged terrain

F4S-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT AND SLOPING

Capacity: 8 000 - 16 000 kg

Width: 1 000 - 3 000 mm

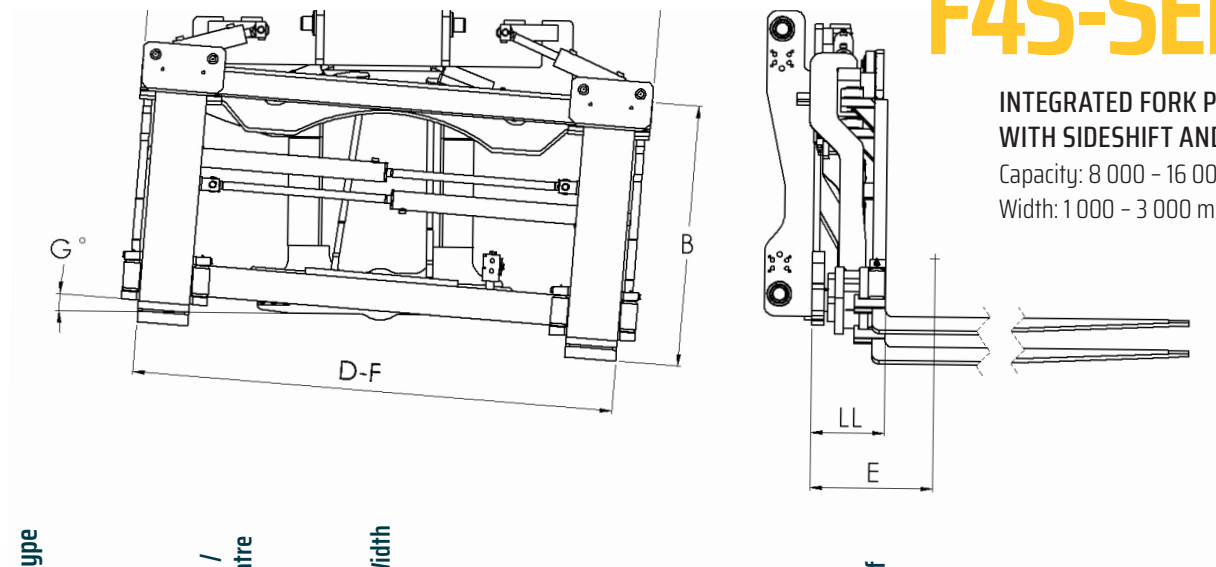

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Degrees of slope	Centre of gravity	Height	Weight	Effective Thickness
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	G °	E [c.] mm	B mm	kg	LL mm
F4S-81/1800	8000/600	1800	450-1650	150x65x1200	± 5	190	950	1520	275
F4S-81/1900	8000/600	1900	450-1750	150x65x1200	± 5	185	950	1540	275
F4S-81/2000	8000/600	2000	450-1850	150x65x1200	± 5	180	950	1560	275
F4S-81/2100	8000/600	2100	450-1950	150x65x1200	± 5	175	950	1580	275
F4S-81/2200	8000/600	2200	450-2050	150x65x1200	± 5	170	950	1600	275
F4S-81/2300	8000/600	2300	450-2150	150x65x1200	± 5	165	950	1620	275
F4S-81/2400	8000/600	2400	450-2250	150x65x1200	± 5	160	950	1640	275
F4S-140/1800	14000/600	1800	540-1700	200x70x2400	± 5	480	1160	1950	300
F4S-140/1900	14000/600	1900	540-1800	200x70x2400	± 5	450	1160	2000	300
F4S-140/2000	14000/600	2000	540-1900	200x70x2400	± 5	420	1160	2050	300
F4S-140/2100	14000/600	2100	540-2000	200x70x2400	± 5	390	1160	2100	300
F4S-140/2200	14000/600	2200	540-2100	200x70x2400	± 5	360	1160	2150	300
F4S-140/2300	14000/600	2300	540-2200	200x70x2400	± 5	330	1160	2200	300
F4S-140/2400	14000/600	2400	540-2300	200x70x2400	± 5	300	1160	2250	300
F4S-140/2500	14000/600	2500	540-2400	200x70x2400	± 5	270	1160	2300	300
F4S-160/2300	16000/1200	2300	750-2150	250x90x2400	± 4	420	1360	2450	386
F4S-160/2500	16000/1200	2500	750-2350	250x90x2400	± 4	410	1360	2510	386
F4S-160/2700	16000/1200	2700	750-2550	250x90x2400	± 4	400	1360	2570	386
F4S-160/3000	16000/1200	3000	750-2850	250x90x2400	± 4	390	1360	2630	386