

OC-SERIES

INTEGRATED FORK POSITIONER
WITH OVER CENTRE SIDESHIFTING


Capacity: 2 000 – 2 500 kg

Width: 900 – 1 200 mm

SUITED FOR WAREHOUSE AND TERMINAL

FEATURES

- Over centre sideshifting
- High residual capacity
- Light clamp handling
- Very good visibility for the driver



OC-series is one of our problem-solving products. As most people in our industry know, there is always a risk of damage to the attachment or the goods when loading and unloading trucks. The goods are usually placed along the sidewall of the truck. The forks are sometimes used to push the goods in place. This can damage both the attachment and the truck, and also risks damaging the goods. We have solved this problem thanks to our clever and unique design. The pallets can be sideshifted outside the frame, which makes loading and unloading easy, smooth and timesaving.

OPTIONS

Pressure relief valve, load backrest and load protector can be added to the attachment or retrofitted. You can choose forks with other dimensions, other materials and coatings but also with other functions such as leveling forks, KOOL-reachforks® and SmartFork® with sensor technology. The attachment is also available with Carrier plates and QC6 quick-connect system.

MACHINES



Forklift Truck



Reach Truck



Telescopic Handler

APPLICATIONS



Clamping




Loading/Unloading

OC-SERIES

INTEGRATED FORK POSITIONER WITH OVER CENTRE SIDESHIFTING

Capacity: 2 000 - 2 500 kg

Width: 900 - 1 200 mm

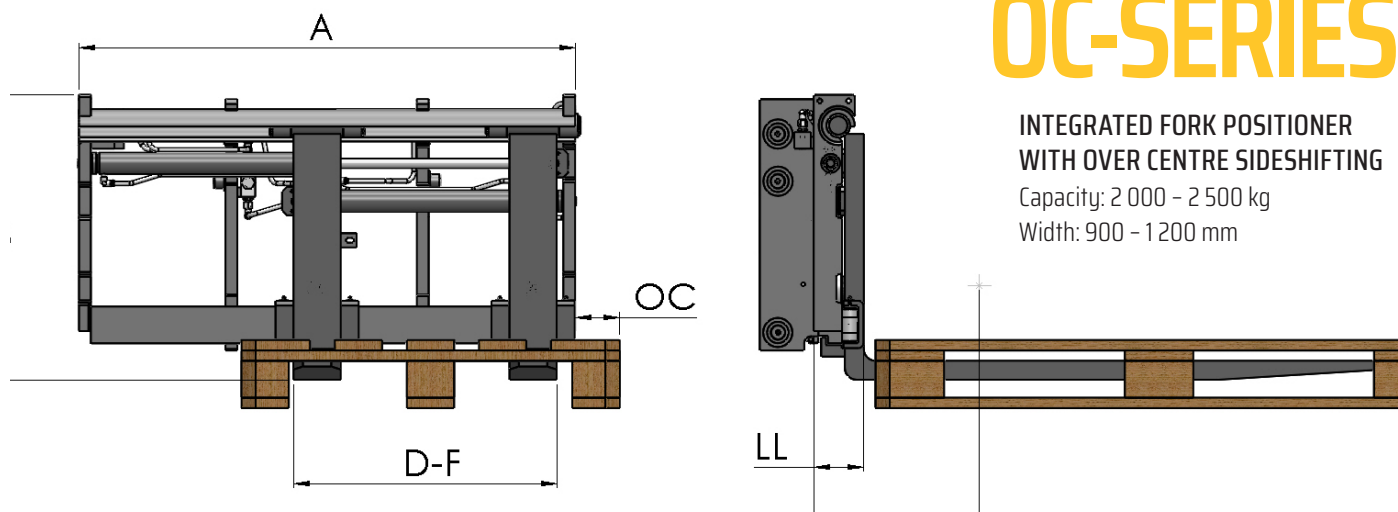

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Over Centre	Centre of gravity	Height	Weight	Effective Thickness
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	OC mm	E [c.] mm	B mm	kg	LL mm
OC2-20/1000	2000/500	1000	300-920	100x40x1200	120	225	603	217	96
OC2-20/1050	2000/500	1050	300-970	100x40x1200	95	220	603	220	96
OC2-20/1100	2000/500	1100	300-1020	100x40x1200	70	215	603	223	96
OC2-20/1150	2000/500	1150	300-1070	100x40x1200	45	210	603	226	96
OC2-20/1200	2000/500	1200	300-1120	100x40x1200	20	205	603	229	96
OC2-25/1000	2500/500	1000	300-920	100x45x1200	120	240	603	228	101
OC2-25/1050	2500/500	1050	300-970	100x45x1200	95	235	603	231	101
OC2-25/1100	2500/500	1100	300-1020	100x45x1200	70	230	603	234	101
OC2-25/1150	2500/500	1150	300-1070	100x45x1200	45	225	603	237	101
OC2-25/1200	2500/500	1200	300-1120	100x45x1200	20	220	603	240	101